VENTURE LIGHTING LED HIGHBAY

150 WATT DALI-2

HOTOMETRIC DATA^

NOMINAL LUMENS:	24,750
NOMINAL LUMENS PER WATT (LM/W):	165
COLOUR TEMPERATURE (K):	4,000
COLOUR RENDERING INDEX (CRI):	80+
BEAM ANGLE (°):	120
LIGHT DISTRIBUTION:	SYMMETRICAL

ELECTRICAL DATA

NOMINAL INPUT (W):	150
NOMINAL INPUT (V) ±10%:	220-240
NOMINAL VOLTAGE TYPE:	AC
NOMINAL INPUT CURRENT (A):	0.68
NOMINAL POWER FACTOR:	>0.9
NO. PER C16 BREAKER:	9
ELECTRICAL CLASS:	1
TYPE OF WIRING:	2M FLEX / AU APPROVED PLUG
WIRING X-SEC (MM^2):	1.0
DALI-2 DIMMABLE:	YES (0.3M CABLE - NO PLUG)

PHYSICAL DATA

HOUSING COLOUR:	BLACK
HOUSING MATERIAL:	ALUMINIUM
MOUNTING METHOD:	PENDANT
REFLECTOR:	NONE (ORDER SEPARATELY - SEE PAGE 2)
HEIGHT/DEPTH (MM):	125
DIAMETER (MM):	260
WEIGHT (KG):	2.2
LAMP TYPE:	LED (NOT EXCHANGEABLE)
IMPACT RESISTANCE RATING:	IK08 (WITHOUT REFLECTOR)
WARRANTY (YEARS):	5

ENVIRONMENTAL DATA

IP RATING:	IP65
AMBIENT TEMPERATURE RANGE:	-30°C / +40°C
L70 (Ta = 30°C):	>50,000 HOURS


ORDER CODE: INDA150-H2-D2







LUMENS PER WATT * NOMINAL



SEE OVER PAGE FOR REFLECTORS (OPTIONAL)

Notes: This Product Specification contains data about typical performance at nominal power. Actual values may depend on ballast and applications. Data is based upon tests performed by (or on behalf of) Venture Lighting in a controlled environment and is representative of relative performance at the relevant nominal power/voltage. Actual performance can vary depending on operating conditions.

^Photometric data listed relates to 120° (no reflector) version.

Data is subject to change without notice. Images used for illustrative purposes only. Actual product may differ.

Revision Date: 08/08/2022




VENTURE LIGHTING IS AN ADVANCED LIGHTING TECHNOLOGIES COMPANY AUSTRALIA | venturelighting.com.au | adlt.com.au | +61 3 9800 5600 NEW ZEALAND | venturelighting.co.nz | adlt.co.nz | +64 07 579 0163 SINGAPORE | venturelighting.com.sg | adlt.com.sg | +65 6844 2338

VENTURE LIGHTING LED HIGHBAY

150 WATT DALI-2

ORDER CODE: INDA150-H2-D2



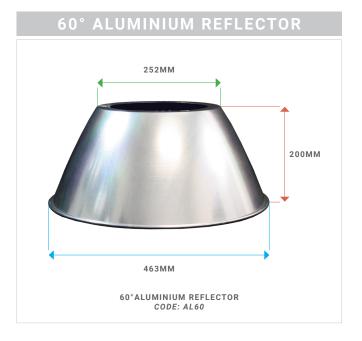

253MM 253MM 132MM 132MM 400MM S0°ALUMINIUM REFLECTOR CDE: AL90

*REFLECTORS OPTIONAL. MUST BE ORDERED SEPERATELY. CONTACT VENTURE LIGHTING FOR OTHER OPTIONS & ACCESSORIES



Notes: This Product Specification contains data about typical performance at nominal power. Actual values may depend on ballast and applications. Data is based upon tests performed by (or on behalf of) Venture Lighting in a controlled environment and is representative of relative performance at the relevant nominal power/voltage. Actual performance can vary depending on operating conditions.

^Photometric data listed relates to 120° (no reflector) version.

Data is subject to change without notice. Images used for illustrative purposes only. Actual product may differ.

Revision Date: 08/08/2022



VENTURE LIGHTING IS AN ADVANCED LIGHTING TECHNOLOGIES COMPANY AUSTRALIA | venturelighting.com.au | adlt.com.au | +61 3 9800 5600 NEW ZEALAND | venturelighting.con.z | adlt.con.z | +64 07 579 0163 SINGAPORE | venturelighting.com.sg | adlt.com.sg | +65 6844 2338