VENTURE LIGHTING LED HIGHBAY


200 WATT

ORDER CODE: INDA200-H2







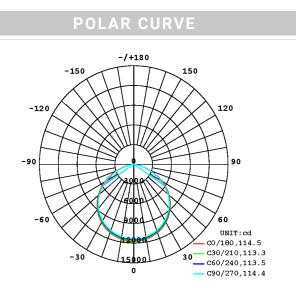

SEE OVER PAGE FOR REFLECTORS (OPTIONAL)

Notes: This Product Specification contains data about typical performance at nominal power. Actual values may depend on ballast and applications. Data is based upon tests performed by (or on behalf of) Venture Lighting in a controlled environment and is representative of relative performance at the relevant nominal power/voltage. Actual performance can vary depending on operating conditions.

^Photometric data listed relates to 120° (no reflector) version.

Data is subject to change without notice. Images used for illustrative purposes only. Actual product may differ.

Revision Date: 08/08/2022



VENTURE LIGHTING IS AN ADVANCED LIGHTING TECHNOLOGIES COMPANY AUSTRALIA | venturelighting.com.au | adlt.com.au | +61 3 9800 5600 NEW ZEALAND | venturelighting.co.nz | adlt.co.nz | +64 07 579 0163 SINGAPORE | venturelighting.com.sg | adlt.com.sg | +65 6844 2338

ELECTRICAL DATA NOMINAL INPUT (W): 200 NOMINAL INPUT (V) ±10%: 220-240 NOMINAL VOLTAGE TYPE: AC NOMINAL INPUT CURRENT (A): 0.91 NOMINAL POWER FACTOR: >0.9 NO. PER C16 BREAKER: 7 ELECTRICAL CLASS: 1

NOMINAL LUMENS: 33.000

BEAM ANGLE (°): 120 LIGHT DISTRIBUTION: SYMMETRICAL

NOMINAL LUMENS PER WATT (LM/W): 165

COLOUR TEMPERATURE (K): 4,000 COLOUR RENDERING INDEX (CRI): 80+

> TYPE OF WIRING: 2M FLEX / AU APPROVED PLUG WIRING X-SEC (MM^2): 1.0 1-10V DIMMABLE: YES (0.3M CABLE - NO PLUG) DALL: OPTIONAL

PHYSICAL DATA

HOUSING COLOUR:	BLACK
HOUSING MATERIAL:	ALUMINIUM
MOUNTING METHOD:	PENDANT
REFLECTOR:	NONE (ORDER SEPARATELY - SEE PAGE 2)
HEIGHT/DEPTH (MM):	145
DIAMETER (MM):	260
WEIGHT (KG):	2.2
LAMP TYPE:	LED (NOT EXCHANGEABLE)
IMPACT RESISTANCE RATING:	IK08 (WITHOUT REFLECTOR)
WARRANTY (YEARS):	5

ENVIRONMENTAL DATA

	IP RATING:	IP65
AMBIENT TEMPERATU	RE RANGE:	-30°C/+40°C
L70 (T	a = 30°C):	>50,000 HOURS

AGE 2)


LUMENS PER WATT

VENTURE LIGHTING LED HIGHBAY

200 WATT

ORDER CODE: INDA200-H2



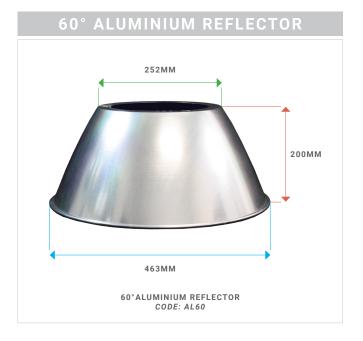

90° ALUMINIUM REFLECTOR



^{*}REFLECTORS OPTIONAL. MUST BE ORDERED SEPERATELY. CONTACT VENTURE LIGHTING FOR OTHER OPTIONS & ACCESSORIES



Notes: This Product Specification contains data about typical performance at nominal power. Actual values may depend on ballast and applications. Data is based upon tests performed by (or on behalf of) Venture Lighting in a controlled environment and is representative of relative performance at the relevant nominal power/voltage. Actual performance can vary depending on operating conditions.

^Photometric data listed relates to 120° (no reflector) version.

Data is subject to change without notice. Images used for illustrative purposes only. Actual product may differ.

Revision Date: 08/08/2022



VENTURE LIGHTING IS AN ADVANCED LIGHTING TECHNOLOGIES COMPANY AUSTRALIA | venturelighting.com.au | adlt.com.au | +61 3 9800 5600 NEW ZEALAND | venturelighting.co.nz | adlt.co.nz | +64 07 579 0163 SINGAPORE | venturelighting.com.sg | adlt.com.sg | +65 6844 2338